

the blowers, a stainless steel filter is standard at the intake connection!!!


Design: Centrifugal blower

Item No.: 5103507

Volumetric current	Overall pressure difference	Voltage	Frequency	Current consumption	Speed	Motor power	Noise pressure level	Weight
m ³ / min	Pa	V	Hz	A	rpm	KW	LpA (db)	KG
4,9	1000	200 - 277	50	0,45-0,48	2750	0,8	73	8,5
		345 - 480		0,26-0,28				
5,9	1600	200 - 277	60	0,59-0,55	3120	0,14	76	8,5
		345 - 480		0,34-0,32				

Intake port : Ø 70mm
Discharge port : Ø 60 mm (exterior)
Dimensions (lxwxh) : 231 x 356.5 x 344.5

Ambient temperature : -20°C to +60°C
Type of protection : IP 54
Optionally 1 x 230 V : Capacitor 230 V; 8 µF / V

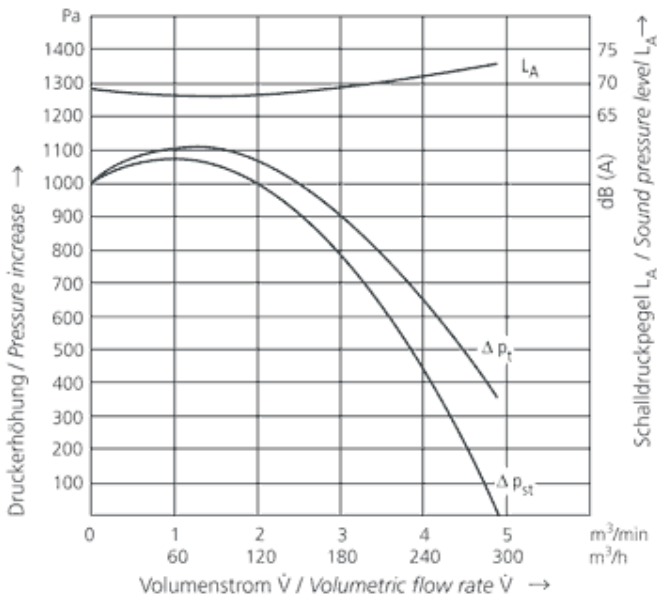

Accessories MD10:

5110887	Motor capacitor 230V with clamp and cable
5107278	Hose connection adapter 1 x 60 / 2 x 60mm
5107291	Hose connection adapter 1 x 60 / 1 x 38mm
5107293	Hose connection adapter 1 x 38 / 2 x 38mm
5207293	Hose connection adapter 1 x 38 / 2 x 38mm - with thread
5107288	Air hose made from PVC Ø 60mm
5107285	Hose strap for hose Ø 60mm
5107286	Air hose made from PVC Ø 38mm
5107287	Hose strap for hose Ø 38mm

Special accessories on request