

Applications

Plastic welding

thermoplastics, pipes, profiles, sheet, moulded parts, flooring, tarpaulins, geomembranes, roofing membranes

Heating

forming, bending, expanding

Drying

water damp surfaces and joints

Shrinking

heat-shrink sleeves, film, tapes, solder sleeves, moulded shrink parts

Ignition

wood furnaces, coal furnaces

Soldering

soldering and desoldering

Activating

solvent-free adhesives, removal of self-adhesive labels / signwriting, hot-melt glue

De-icing

frozen parts, water pipes

Guarantee

This Techspan tool is guaranteed for 2 years from the date of purchase against electrical breakdown or mechanical failure caused through defective material or workmanship, provided the failure is not the result of misuse. In the event of failure covered by this Guarantee, the tool must be returned freight paid to the supplier, with this card and proof of purchase, for inspection, and will be replaced or repaired at our option. Heating elements, and wearing parts, brushes, bearings etc are not covered by this guarantee.

Type : Techspan Rion Plastic Welder 1600W 230V 50Hz

Date purchased :

Customer :

Supplied by : Techspan Group

OPERATING INSTRUCTIONS

TECHSPAN HOT AIR PLASTIC WELDING TOOL type Rion 'heavy-duty'

Please read operating instructions carefully before use and keep for future reference.



Technical Data

Power	W	1600
Voltage	V	230 50/60Hz
Temperature	C	20 - 600
Airflow	l/min.	230
Noise	dB	60
Weight	kg	1.4 with 3m cable
Dimensions	mm	Handle 56mm, 340x100 dia
Electrical Safety :		Double insulated
Test Marks :		CE
		Made in Switzerland

Australia:

P O Box 1012, Mascot, NSW 1460, Sydney
Ph: 1-800 148 791 Fx: 1-800 148 799
sales@techspanonline.com

New Zealand:

P O Box 15262, New Lynn, Auckland
Ph: ++64 9 8276567 Fx: ++64 9 827 6596
sales@techspanonline.com

TECHSPANGROUP

PLASTIC WELDING SYSTEMS

www.techspanonline.com

Australia:

P O Box 1012, Mascot, NSW 1460, Sydney
Ph: 1-800 148 791 Fx: 1-800 148 799
sales@techspanonline.com

New Zealand:

P O Box 15262, New Lynn, Auckland
Ph: ++64 9 8276567 Fx: ++64 9 827 6596
sales@techspanonline.com


TECHSPANGROUP

PLASTIC WELDING SYSTEMS

www.techspanonline.com

OPERATING INSTRUCTIONS - TECHSPAN HOT AIR PLASTIC WELDER

OPERATING INSTRUCTIONS - TECHSPAN HOT AIR PLASTIC WELDER

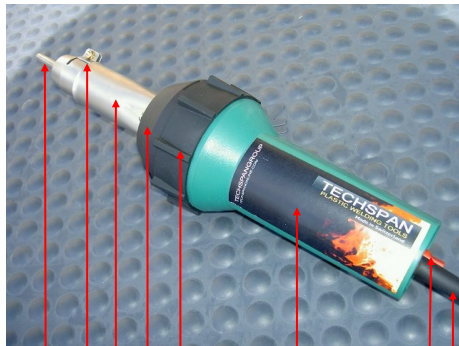

1 2 3 4 5 6 7 8

9 10 8 11

Description

1	Nozzle (LE100303 plastic welding nozzle shown)	*Setting	Deg. C
2	Clamp screw for nozzle	0	0
3	Element housing / protective sleeve	1	90
4	Impellor housing	2	150
5	Rubber tool rest	3	200
6	Handle	4	270
7	Potentiometer for temperature adjustment	5	310
8	Mains cable	6	370
9	Air filter	7	430
10	Potentiometer for temperature adjustment *	8	490
11	On/Off switch	9	540
		10	600

To operate the tool

- 1 Fit appropriate nozzle (1,2) as required
- 2 Connect tool to the mains
- 3 Adjust hot air temperature by turning the potentiometer (10)
- 4 Turn on switch (11) and allow tool to come up to temperature (3 mins)
- 5 After use always let the tool cool down
- 6 For plastic welding training contact Techspan or approved service centre.

Changing Nozzles

- 1 Before changing nozzles, allow the tool to cool down, or use combination pliers
- 2 Do not touch hot nozzle (1,2) and only place the nozzle on a heat resistant surface due to fire hazard.
- 3 The nozzles are easily pushed onto the element housing (3) and are then secured by tightening the clamp screw (2) with a screwdriver.
- 4 Only Techspan nozzles and accessories should be used.

Maintenance

- 1 The welding tool's air filter (9) must be cleaned with a brush if necessary.
- 2 A wire brush should be used for cleaning the welding nozzle (1)
- 3 Check power supply cable (8) along the full length, as well as the plug, for any possible electrical or mechanical damage.

Service and repairs

- 1 The carbon brushes of the tool's motor should be checked after about 1200 hours running time by your service centre.
- 2 Repairs must be carried out by Techspan service centres. They guarantee a specialized and reliable repair service.
- 3 The warranty will be void if repairs have not been carried out by a Techspan service centre using Techspan spare parts.

Accessories

- 1 The Techspan plastic welder is supplied without nozzles, which are sold separately.
- 2 Only Techspan nozzles and accessories should be used.

Guarantee and Liability

Guarantee and liability are in accordance with the guarantee certificate and the current terms and conditions of sale. Techspan rejects any guarantee claims for tools which are not in original condition. The tool must never be modified.

Caution - Risk of Serious Injury and property damage

Always lie the tool on a non-flammable surface & keep the hot air stream well away from combustible materials, including combustible materials hidden behind ceilings, walls, cavities or floors. Do not point the hot air stream at the same spot for extended periods. Incorrect use can cause fire. Do not touch the element housing or nozzle with any part of the body during use as they get very hot and there is a danger of serious injury by burning. When working with plastics, varnish or similar materials vapours/gases/smoke develop which can be harmful. Do not breathe in vapours/gasses/smoke as they can be highly toxic. Always provide good ventilation of the working area with an extraction system and/or wear a respirator. Keep the unit dry. Do not use in the rain or in damp conditions. Always store the unit in a dry place.